

www.ringer.hr



Konzole

JEDNOSTRANE OPLATE

**LET'S
BUILD**



RINGER
OPLATE I SKELE



RINGER konzole jednostrane oplata

IDEALNO RJEŠENJE ZA JEDNOSTRANO
OPLAĆIVANJE


Konzole za podupiranje

- Mogućnost primjene do 6,0 m visine
- Pritisak betona do 60 kN/m²
- Brzo spajanje bez dodatnih dijelova
- Priključci montirani na konzolu
- Četiri veličine konzola od 2,7 m do 6,0 m visine podupiranja
- Pogodne za sve RINGER tipove oplata

Konzola jednostrane oplata „L“

Područje primjene do 2,7 m


- za visine oplata do 2,7 m
- udaljenost između konzola maks. 1,0 m
- pogodna za sve Master i Sistem 2000 oplata
- sidrenje pomoću sidrene petlje ili valovitog sidra DW15
- dopušteni pritisak svježeg betona maks. 50 kN/m²
- može se rastaviti i stoga transportirati ručno

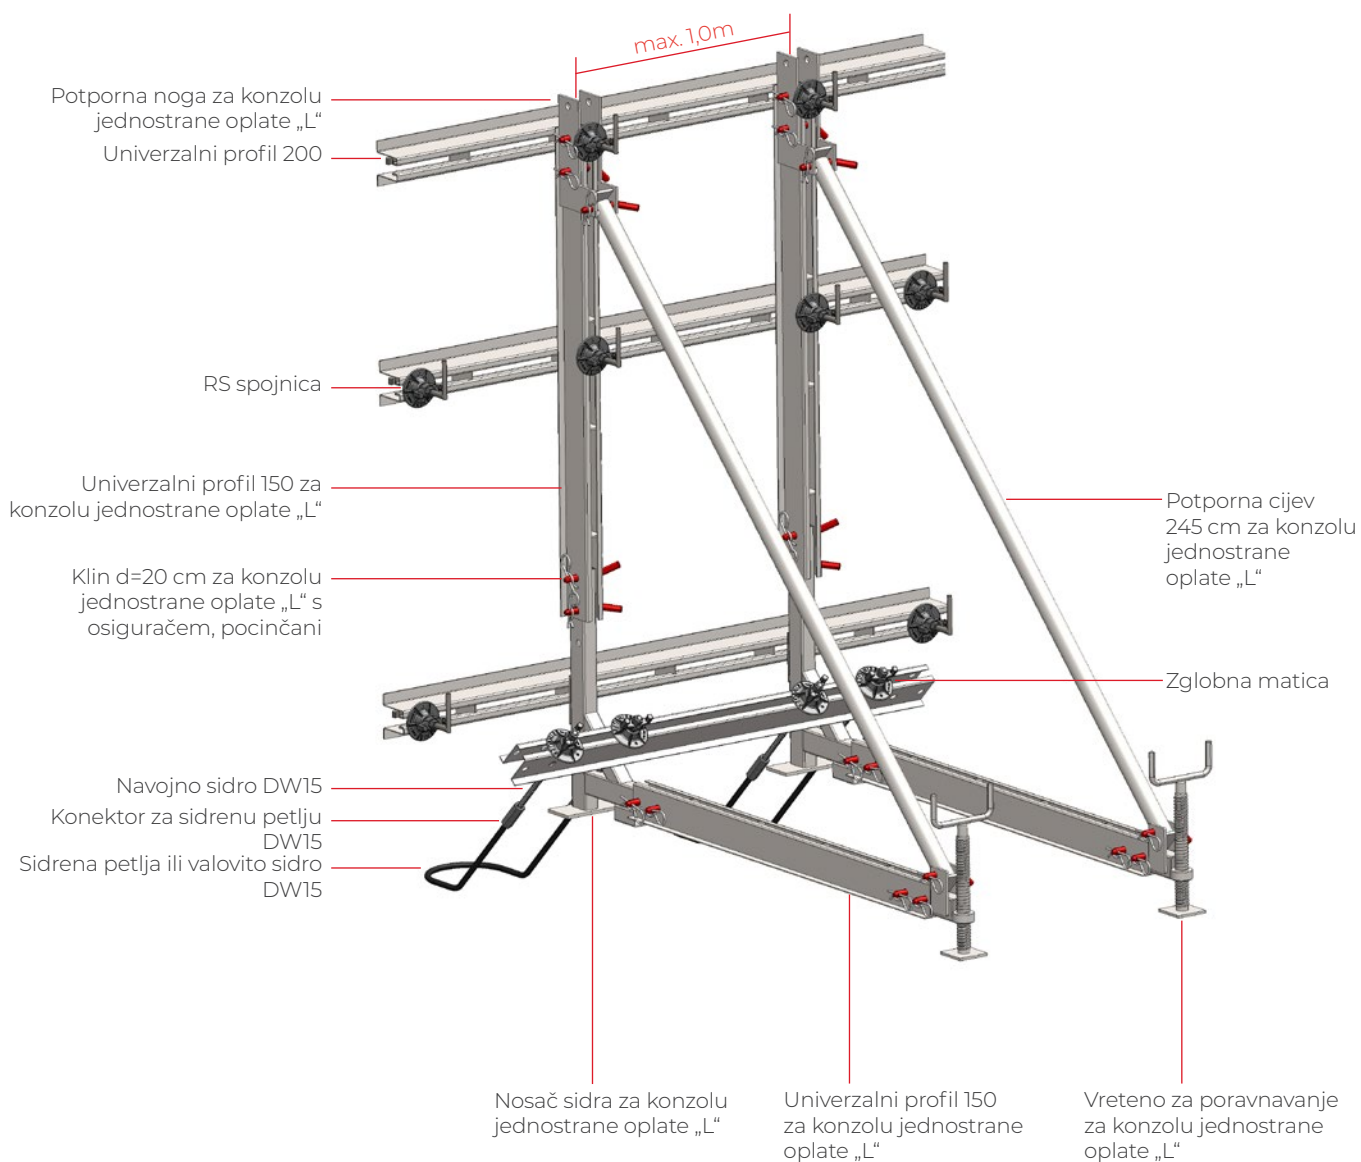

Konzola jednostrane oplata „M“

Područje primjene do 3,3 m


- za visine oplata do 3,3 m
- udaljenost između konzola maks. 1,35 m
- pogodna za sve Master i Sistem 2000 oplata
- sidrenje pomoću sidrene petlje ili valovitog sidra DW15
- dopušteni pritisak svježeg betona maks. 60 kN/m²
- može se pomicati dizalicom zahvaljujući integriranim ušicama dizalice

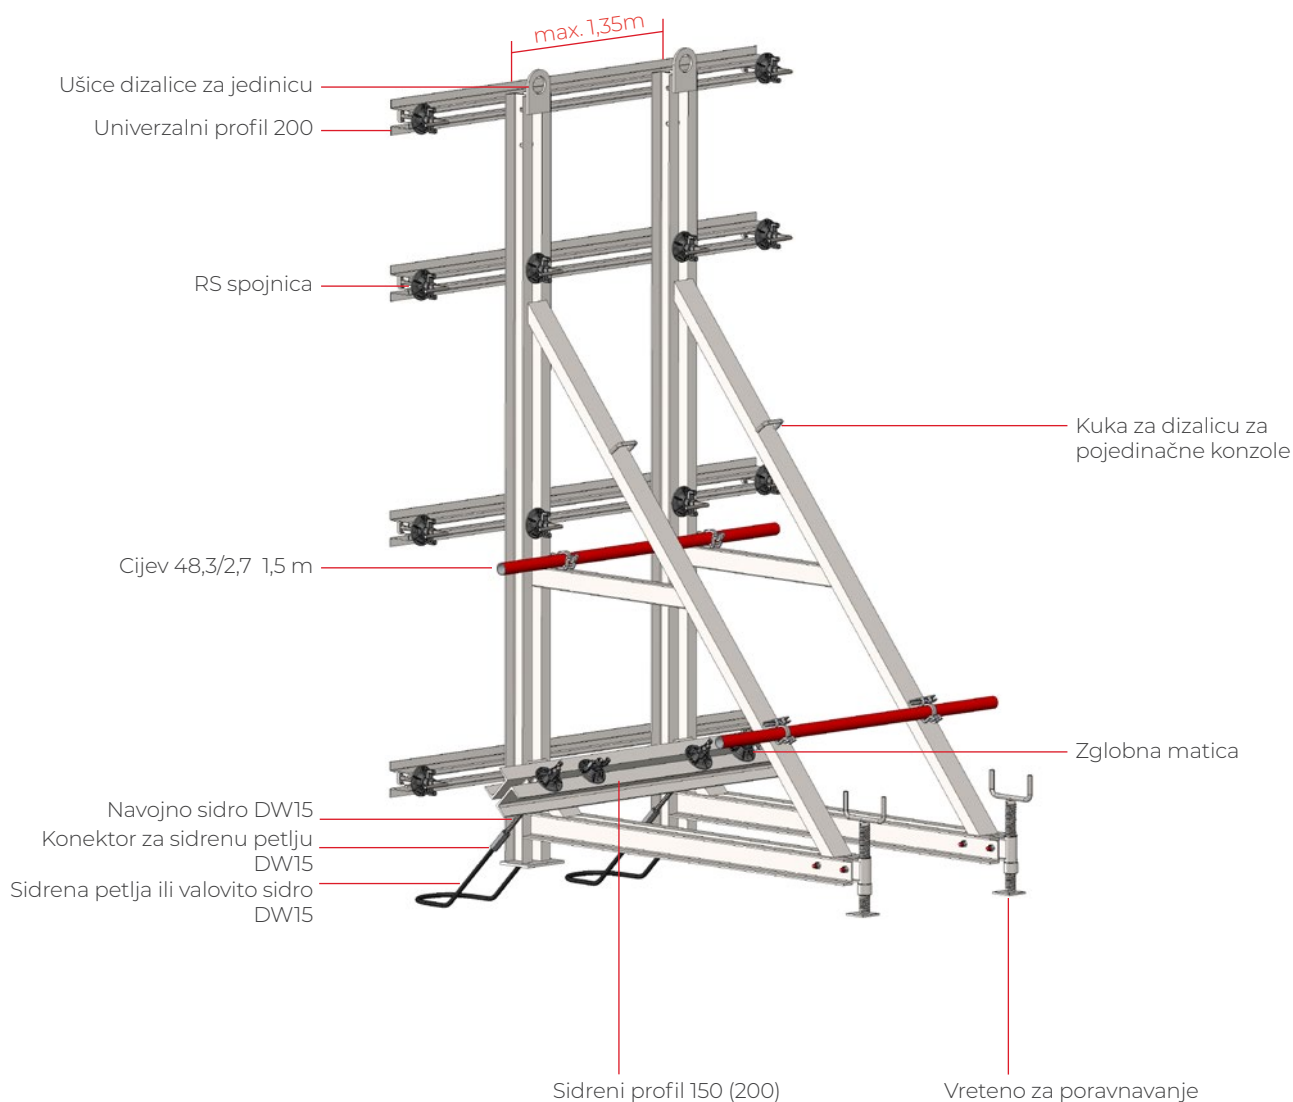

Konzola jednostrane oplaste „S“

Područje primjene do 4,5 m


- za visine oplaste do 4,5 m
- udaljenost između konzola maks. 1,35 m
- pogodna za sve Master i Sistem 2000 oplaste
- sidrenje pomoću sidrene petlje ili valovitog sidra DW15 ili DW20
- dopušteni pritisak svježeg betona maks. 50 kN/m²
- može se pomicati dizalicom zahvaljujući integriranim ušicama dizalice

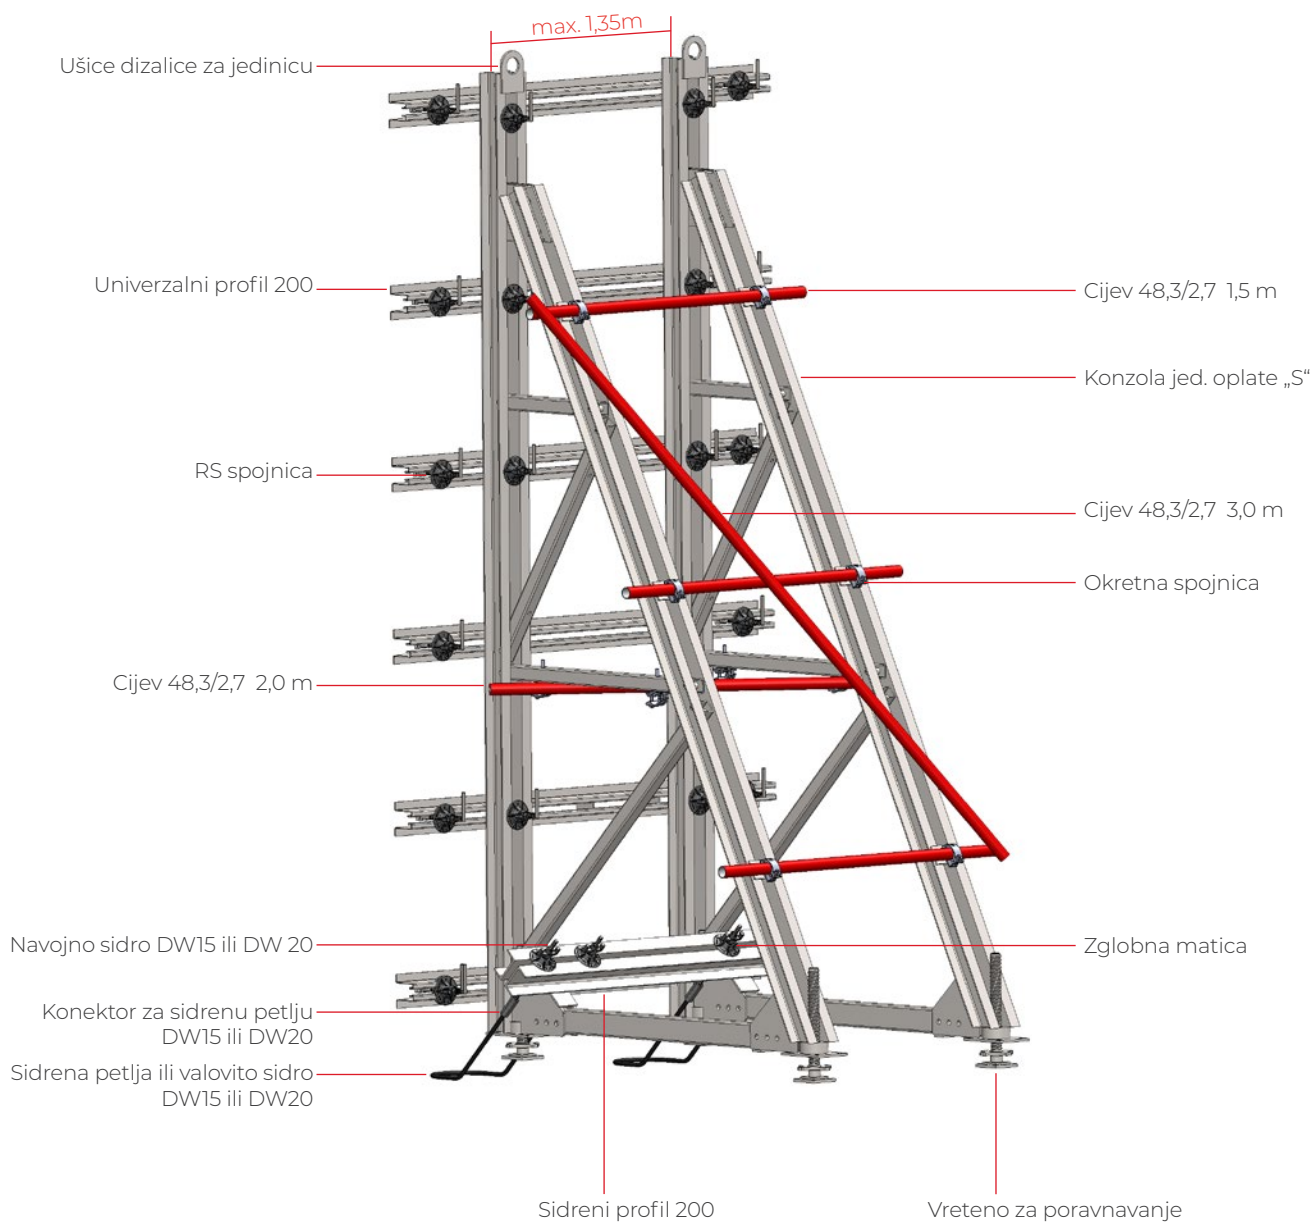

Konzola jednostrane oplata „S“ s okvirom za nadogradnju

Područje primjene do 6,0 m

- za visine oplata do 6,0 m
- udaljenost između konzola maks. 1,35 m
- pogodna za sve Master i Sistem 2000 oplata
- sidrenje pomoću sidrene petlje ili valovitog sidra DW20 ili DW26
- dopušteni pritisak svježeg betona maks. 50 kN/m²
- može se pomicati dizalicom zahvaljujući integriranim ušicama dizalice

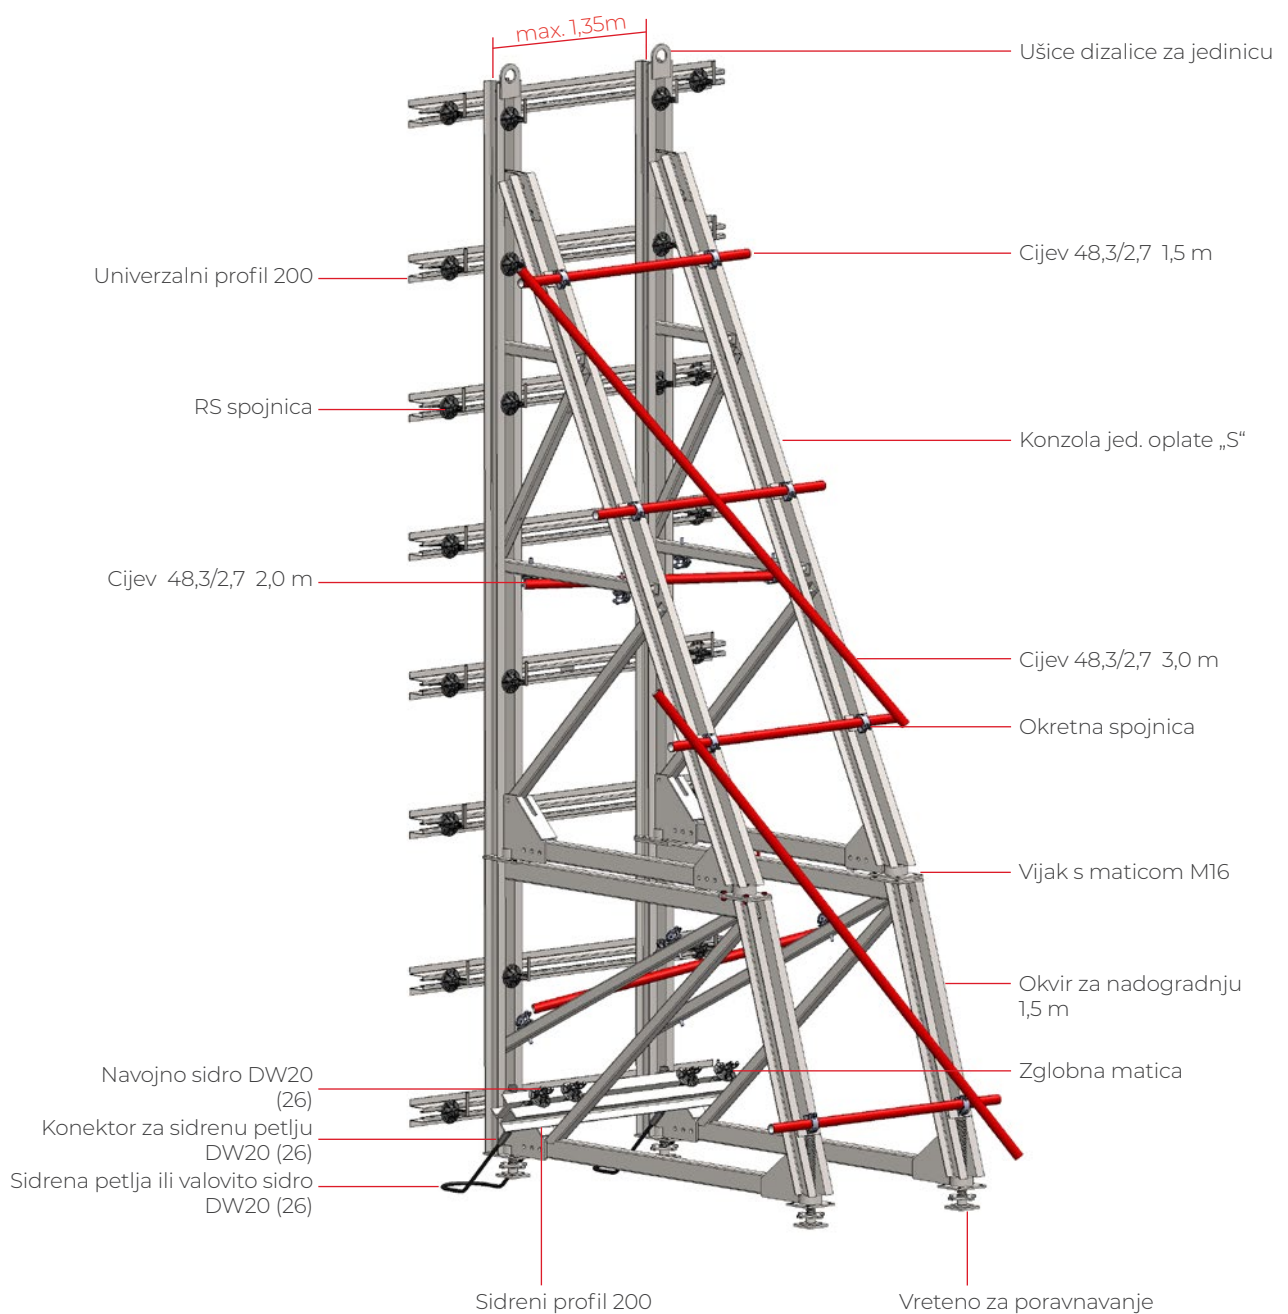

Pojedinačni dijelovi



Potporna noga



Nosač sidra



Vreteno za poravnavanje



Potporna cijev




Zglobna matica DW15 / DW20




Navojno sidro



Okretna spojnica

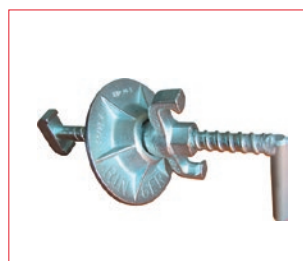

RS spojnica




Sidrena petlja




Konektor za sidrenu petlju



Univerzalni profil 200

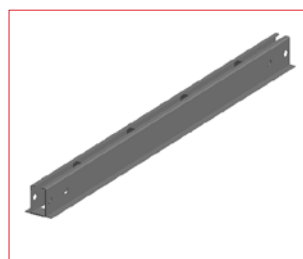


Univerzalni profil 150 za konzolu jednostrane oplaste „L“

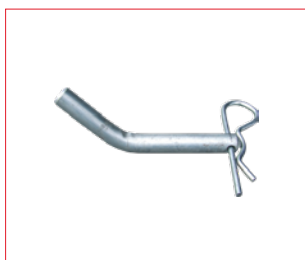

Vijak za povezivanje s opružnim klinom



Konzola jednostrane oplaste „S+ M“ uklj. 2 kom. spojnih vijaka + klin

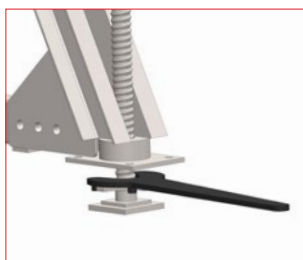

Ključ za podešavanje konzole jednostrane oplaste „S“



Čelična cijev 48,3/2,7

LET'S BUILD



RINGER oplate i skele d.o.o.

Dubrovčan 3b
49214 Veliko Trgovišće
+ 385 49 20 66 71
info@ringer.hr
www.ringer.hr

