

Guardrail clamp

For quick and simple installation of safety guardrail


- Stepless adjustment up to max. 60 cm
- Simple, time saving installation
- Maximal safety against fall from heights (EN13374 class „A“)
- No loose parts (cotter)
- Free-moving due to Dywidag spindle

Installation according BAUV

- | | | |
|------------------|---------------------|------------------|
| - Interval 1,5 m | Planks for parapets | min. 15 x 2,4 cm |
| - Interval 2,0 m | Planks for parapets | min. 15 x 3,0 cm |
| | Toe board | min. 15 x 2,0 cm |

Usage:


Slabs

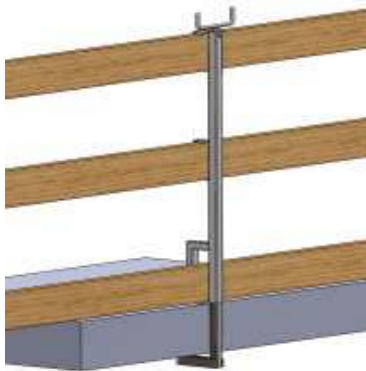



Stringers



Slab formwork

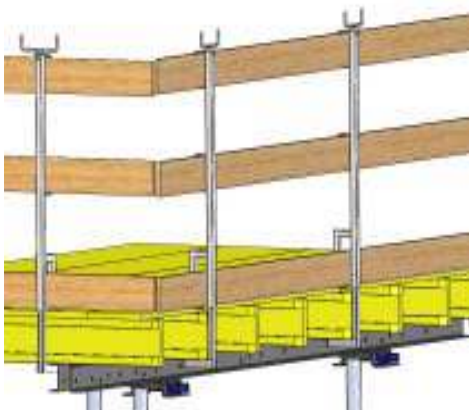

Fixing with dowel and screw

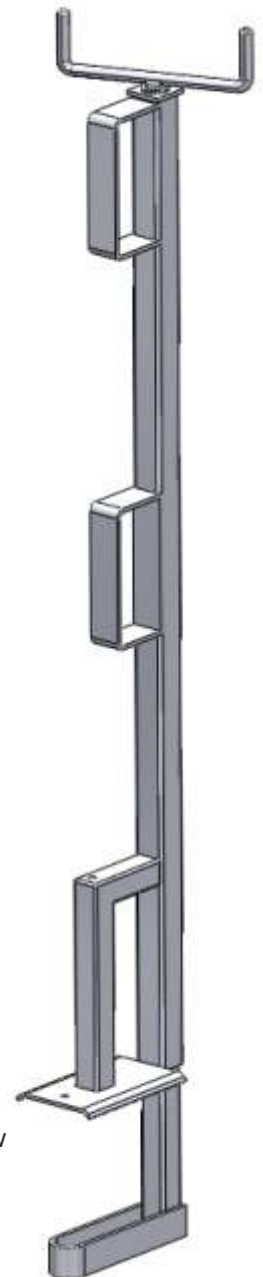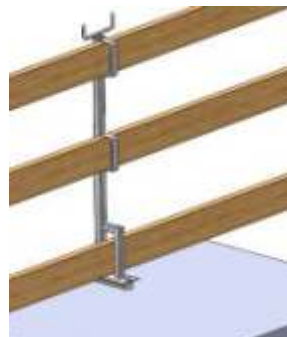

Item	Art. Nr.	Weight
Guardrail clamp galvanized	230V6	8,5 kg

AN 01/16

TECHNIK FÜR DEN BAU

RINGER KG Gerüste – Schalungen

A-4844 Regau, Römerweg 9
 Telefon +43 (0) 7672 727110
 Telefax +43 (0) 7672 78805
 email office@ringer.at
 Internet www.ringer.at



RINGER
 GERÜSTE - SCHALUNGEN