

Transportation Boxes

Transportation Boxes for the construction site

General information:

- all containers are hot-dip galvanized
- suitable for crane and forklift transport
- max. bearing capacity of lifting brackets 1500 kg
- max. angle of lifting tackle to horizontal: $\alpha=60^\circ$
- take care of wind load when stored in open air!

UNI Container:

Outer dimensions:

- Pallet dimensions: 1.200 x 800 x 710mm

- incl. Crane Eyes: 1.260 x 860mm

Bearing capacity: 1.500kg

Models: with or without flap

Load: max. 10.000kg

Ringer Multi-transport box:

Outer dimensions: 1.140 x 740 x 710mm

Bearing capacity: 1.500kg

Load: max. 10.000kg

Ringer pallet cage:

Outer dimensions: 1.700 x 800 x 1.100mm

Bearing capacity: 700kg

Load: max. 2.400kg

Base: 15mm plywood


Accessory Box:

Outer dimensions: 1.970 x 1190 x 630mm

Bearing capacity: 1.500kg

Load: max. 5.000kg

The accessory box offers space for approx. 25 lfm formwork

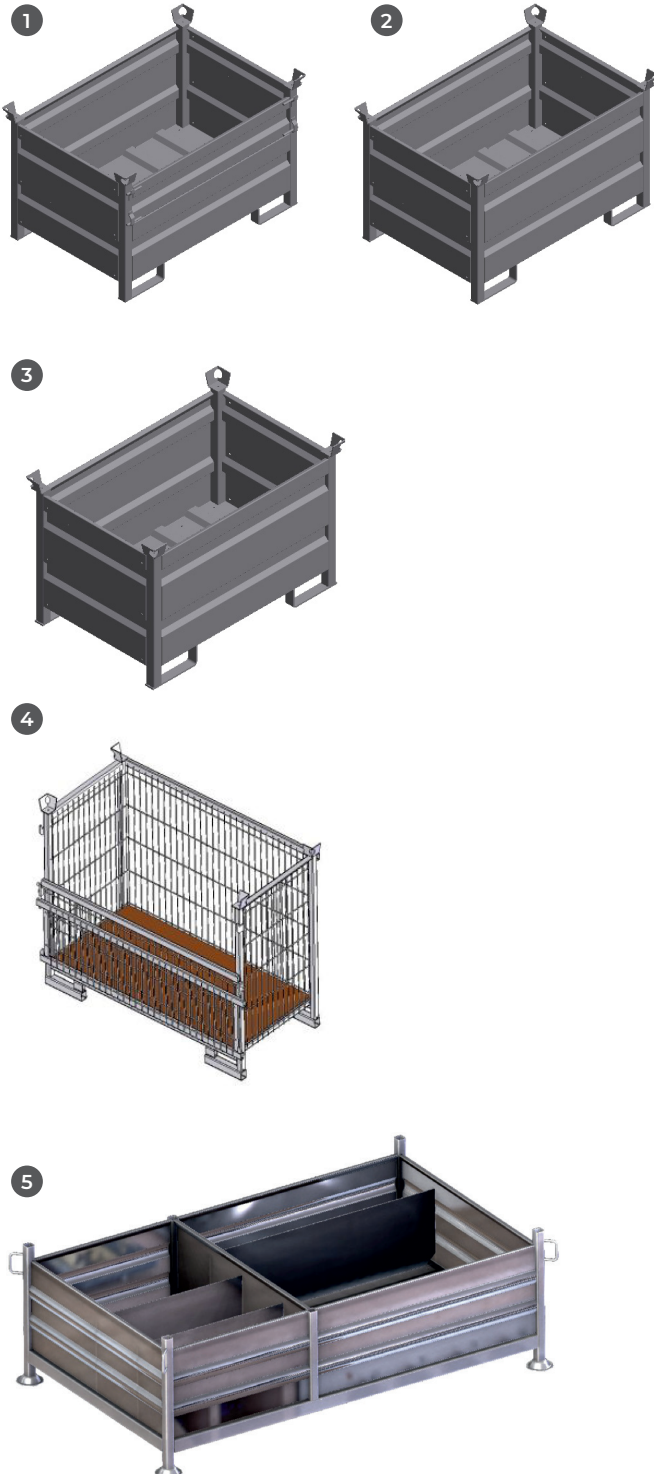

Description

Art. No.

Weight

1	Uni Container with flap	10003660	72,0kg
2	Uni Container without flap	10004321	70,0kg
3	Ringer Multi-transport box	10004322	66,0kg
4	Ringer pallet cage	10004323	87,0kg
5	Accessory Box galvanized	10001327	160,0kg