


Trench Strut Robust + Standard

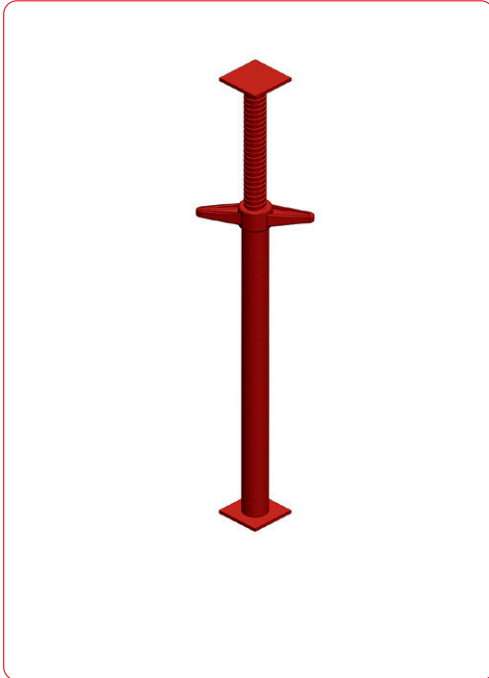


Trench Struts for low supporting areas!
 All trench struts can also be used as props!

Type Robust:

- Spindle is not fixed with nut, therefore can be used with all sizes
- Single sized acting
- Cold rolled thread with high stability
- Head and base plates are bended a little in the corners for safer positioning

Allowed load capacity: 21kN

Description	Art. No.	Weight
Trench Strut Robust size 1 0,55-0,85m	10001953	4,50kg
Trench Strut Robust size 2 0,65-0,95m	10001954	5,00kg
Trench Strut Robust size 3 1,00-1,30m	10001955	6,00kg
Replacement spindle with plate and nut for trench strut robust	10001957	2,40kg

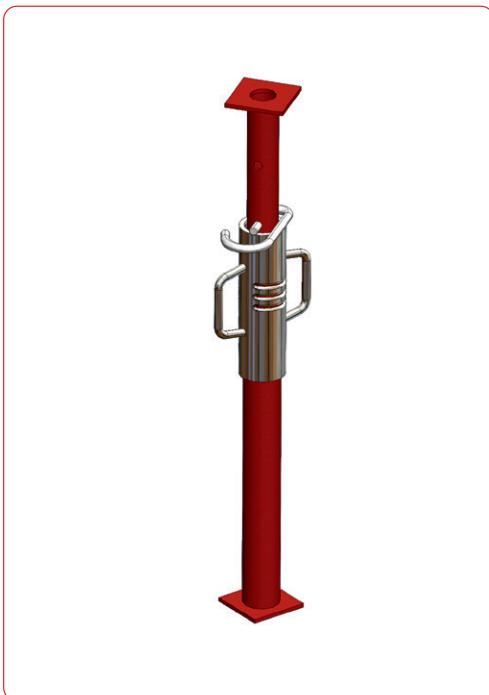

Type Standard:

- Closed thread
- Single side acting
- Big adjustment range
- Special round thread
- Made from thick-walled tubes:
 - outside tube $\varnothing 57 / 2,9\text{mm}$
 - inside tube $\varnothing 48,3 / 3,2\text{mm}$
- Special sizes upon request

Allowed load capacity: 24kN

Description	Art. No.	Weight
Trench Strut Standard size 1 0,60 - 1,00m	10001951	6,00kg
Trench Strut Standard size 2 0,90 - 1,50m	10001952	7,50kg