

www.ringer.at

Double Railing- Scaffolding

STEEL DIP-COATED, GALVANISED, ALUMINIUM

**LET'S
BUILD**



RINGER
SCAFFOLDING + FORMWORK



HEADQUARTERS IN REGAU

Your reliable partner for scaffolding and formwork. RINGER quality since 1944:

- Flexible and quick solutions
- Absolute reliability
- Personal consultation on site
- Fast customised solutions
- We keep our promises
- With absolute passion
- A real family-run company

What are we waiting for? Let's build.

Our head office and the heart of the company is the 111.000 m² manufacturing and logistic facility based in Regau, Austria. Incorporating worldwide distribution to over 50 countries and providing a centre of excellence for research and development makes RINGER a formidable formwork and scaffolding manufacturer.

With subsidiaries in Slovenia, Croatia, Hungary, Czech Republic and Germany, RINGER provides first class design solutions and on-site supervision for the most complex of projects.

Supporting international customers worldwide makes RINGER the ideal partner for all construction needs.





Double Railing Scaffolding

THE FASTEST SCAFFOLDING SYSTEM ON THE MARKET WITH ONLY THREE STANDARD COMPONENTS.

COMPACT VERSATILE AND COST-EFFICIENT

Few system components and a logical installation sequence make the RINGER double railing scaffolding a very economical and safe system.


The patented guardrail lock system ensures that no parts can be lost and assembly is even quicker. Optimized components make our double railing scaffolding one of the lightest (steel) scaffoldings on the market.

Continuous inspections and tests during the manufacturing process guarantee highest quality. This forms the basis for safe work at any scaffolding height.

The system parts at a glance

Thoughtfully designed

The system has been tried and tested over decades, with continuous enhancements making it a classic in the world of scaffolding. The parts can be assembled in just a few simple steps in no time at all.

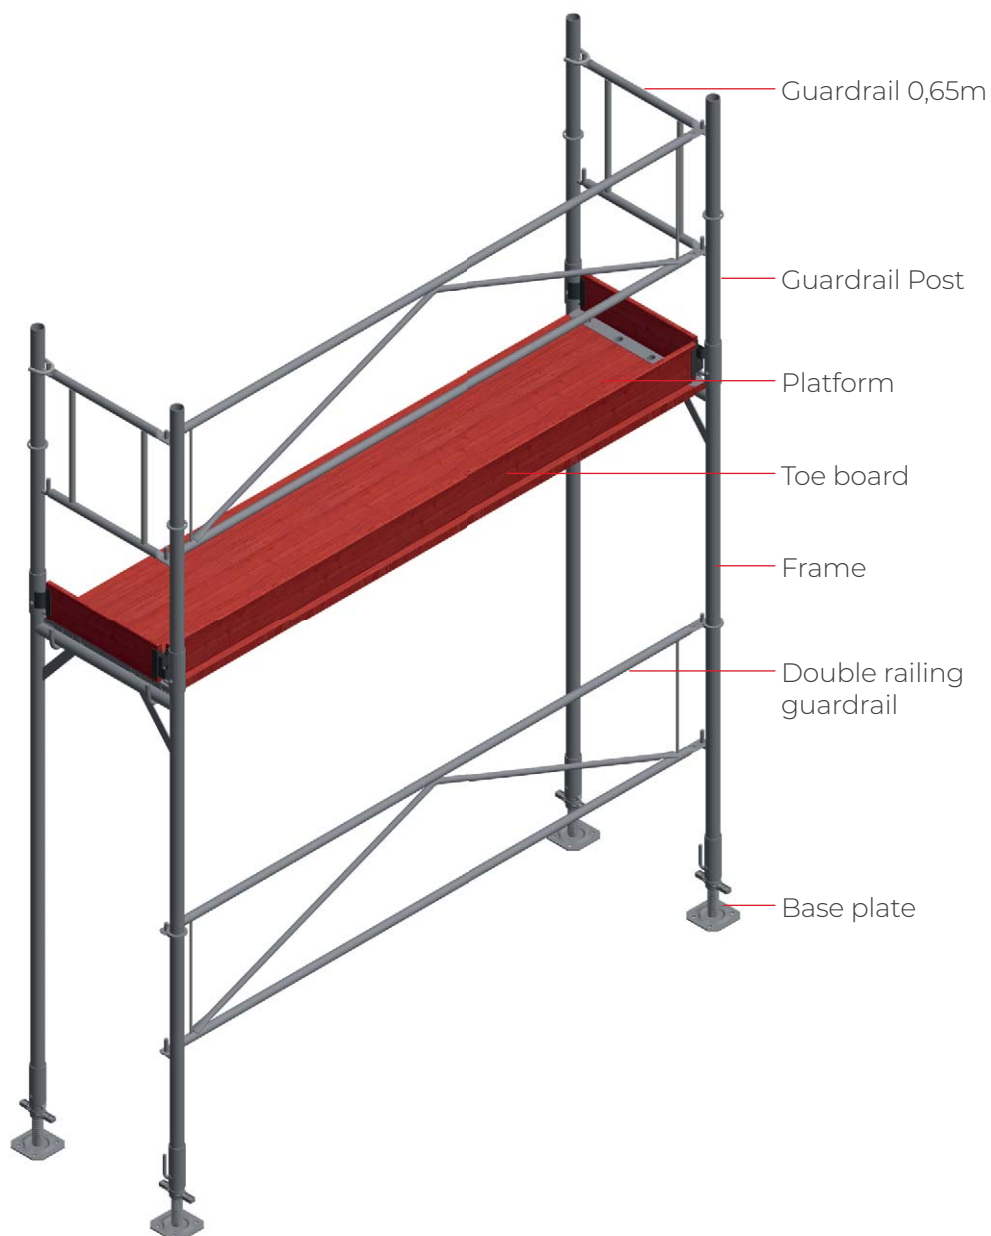

Product features

Double Railing Scaffolding

> Compliant with standards

> Versatile

- Frame heights: 0,70m / 1,00m / 2,00m
- Frame width: 0,65m
- Field lengths: 0,65m / 0,72m / 1,00m / 1,25m
1,50m / 1,85m / 2,00m / 2,50m / 3,00m
- Can be used as working scaffolding, safety scaffolding or protection scaffolding
- Wide range of accessories
- Can also be used as rolling tower
- Multiple platform designs (aluminium, synthetic, woor or steel)

> Lightweight construction

- Steel frame with aluminium platform < 10 kg/m²

> Weather-resistant and stable

- Dip-coated or galvanised steel (rust protected inside and outside)

> Robust and effective

- Steel version: up to scaffolding group 4 – 300 kg/m²
- Aluminium version: scaffolding group 3 – 200 kg/m²

> Time and cost savings

- Quick assembly with only three main parts and smart strut lock
- Low transport and storage costs

> The Austrian scaffolding classic

Well-conceived and efficient



Patented guardrail lock system

In a simple, secure fashion, the patented system prevents braces from unhooking unintentionally.



Galvanised, dip-coated or aluminium

The components of the double railing scaffolding are available either dip-coated or galvanised. Frame, guardrail posts, double railing braces and platforms are also available in light-weight aluminium versions. All components are fully compatible.



Systematic stacking

The practical RINGER stacking system helps to keep trucks, construction sites and the warehouse tidy. It can be transported either by forklift or by crane. All the parts for approx. 200m² can be stored in two pallets. The stacking system is available galvanised or dip-coated.



RATIO pallet

The galvanised pallet enables efficient transportation of 44 frames.

Platforms

for double railing scaffolding



Solid wood platform

- Made of selected solid wood with a minimum grade of S10
- Back-ventilated edge protection to protect against rot
- High-quality surface finish to protect against weathering and rot
- 30cm width: Scaffolding group 4 (300 kg/m²)
- 60cm width: Scaffolding group 3 (200 kg/m²)



Aluminium platform

- Made of high-grade aluminium
- Non-slip surface
- Extremely durable
- 30% lighter than solid wood platform
- 36mm thick
- 60cm structural width: Scaffolding group 4 (300 kg/m²)
- Complies with BauV and ÖNORM B4007



Steel platform

- Galvanised surface
- Non-slip profiling
- Integrated lift-out guard
- 30cm structural width
- Scaffolding group 4 (300 kg/m²)
- Complies with BauV and ÖNORM B4007



Aluminium platform with trapdoor and integrated ladder

This 2.50 x 0.60m platform allows you to move quickly and safely from one scaffolding level to the next. The aluminium platform is available either in solid aluminium or with a sturdy aluminium profile frame and high-quality resin-coated boards. The ladder is firmly mounted and secured by snap lock. Rollers are integrated into the lower end of the ladder.

Applications and solutions



Mobility in scaffolding

With mobile system parts and the Uni Wheeled Chassis, the double railing scaffolding can easily be turned into a practical rolling tower. Adjustable base plates ensure optimum safety and stability.


- Max. working height 6.0m or 8.0m
- Max. total load 600 kg



Walk through frame

The walk through frame ensures that pedestrians can pass through the scaffolding safely. The scaffolding frame can be attached directly to the walk through frame.

- Widths 1.50m / 1.55m / 2.00m

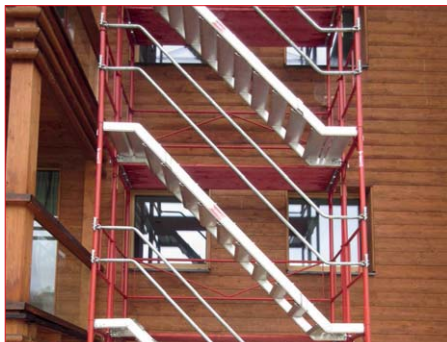

Ladder

Aluminium steps are ideal for accessing the next scaffolding level comfortably and safely.

- Width 0.60m



Protection scaffolding


The double railing scaffolding can also be used as protection scaffolding. The protection post and type-approved safety net protect people from falling.

Applications and solutions



Flexible widening

Thanks to the wide variety of accessories, our double railing scaffolding can easily be widened and extended. Different brackets and suspension solutions from the RINGER product portfolio enable extensions in compliance with standards and laws.

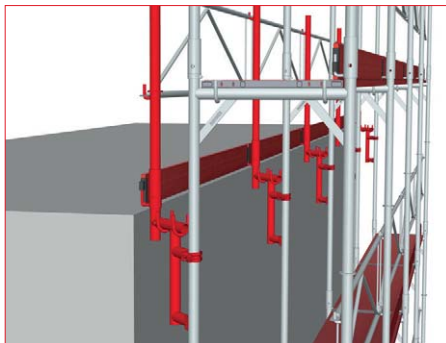

Height adaptive fall protection

RINGER offers fall protection that can be fastened at any height and can grow with the building. This ensures that work on the slab can be carried out safely at all times.



Curved scaffolding

Round floor plans can also be quickly and effectively solved with the double railing scaffolding.



Safety net


The RINGER safety net offers additional protection during work at heights and protects passers-by from dust and dirt.

Reference projects




**Donnenbergpark
Salzburg**

Our galvanized double railing scaffolding with aluminium platforms, ensures safe renovation work.

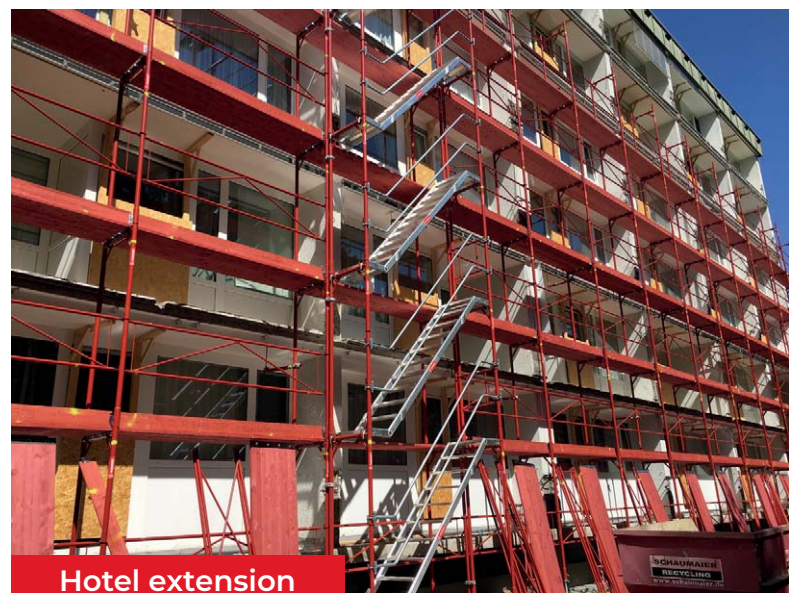

**Hotel extension
Katschberg**

Dip-coated double railing scaffolding with wooden platforms. Aluminium ladders for easy movement between levels.

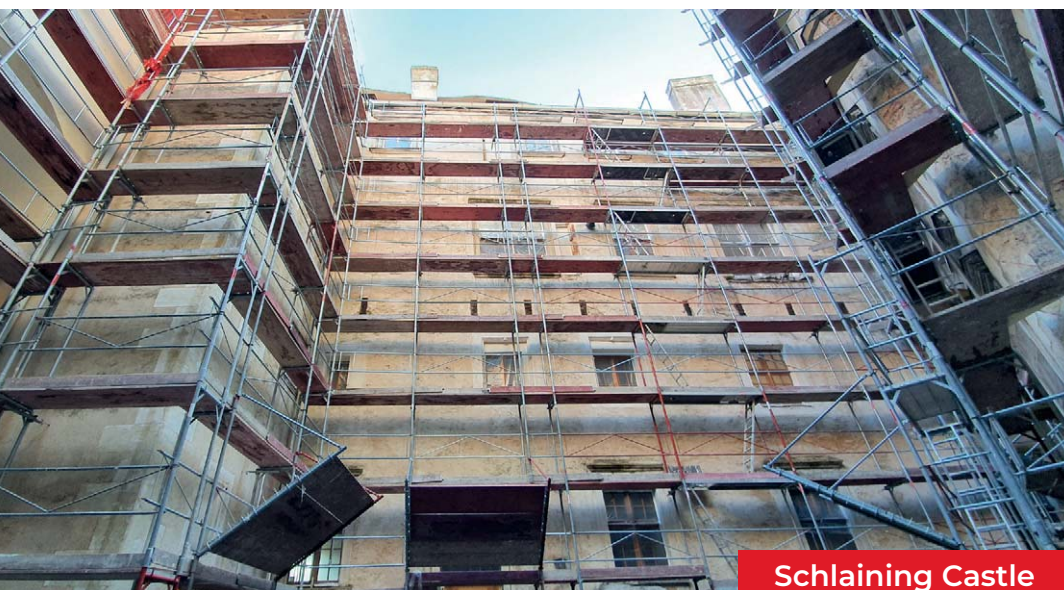

**Schlaining Castle
renovation**

Thanks to the extensive accessory range, comprehensive scaffolding solutions can be constructed quickly and efficiently.



**Hotel
Moscow**



**University of
Lithuania**

The double railing scaffolding can also be used on very high buildings.

LET'S BUILD



RINGER GmbH

A-4844 Regau
Römerweg 9
+43 7672 72711 - 0
office@ringer.at
www.ringer.at



RINGER
SCAFFOLDING + FORMWORK